D10-3

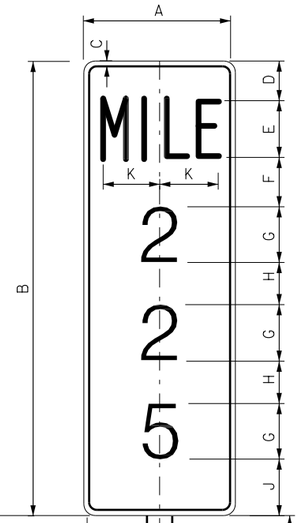

D10-2

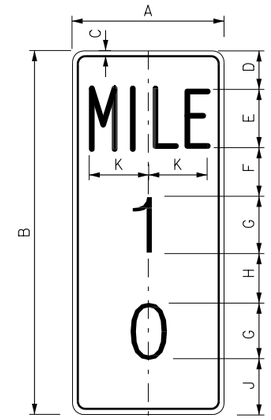

D10-1



D10-3

A	B	C	D
10	30	0.38	3
12	48	0.38	2.2

E	F	G	H
4B	3	4D	2.5
5D	2.8	10D	2.8

J	K	L	
3	3.9	1.5	
2.5	4.9	1.5	

D10-2

A	B	C	D
10	24	0.38	3
12	36	0.38	3

E	F	G	H
4B	3	4D	3
5D	2.5	10D	2.5

J	K	L
3	3.9	1.5
3	4.9	1.5

D10-1

A	B	C	D
10	18	0.38	2.5
12	24	0.38	3

E	F	G	H
4B	4	4D	3.5
5D	3	10D	3

J	K
3.9	1.5
4.9	1.5

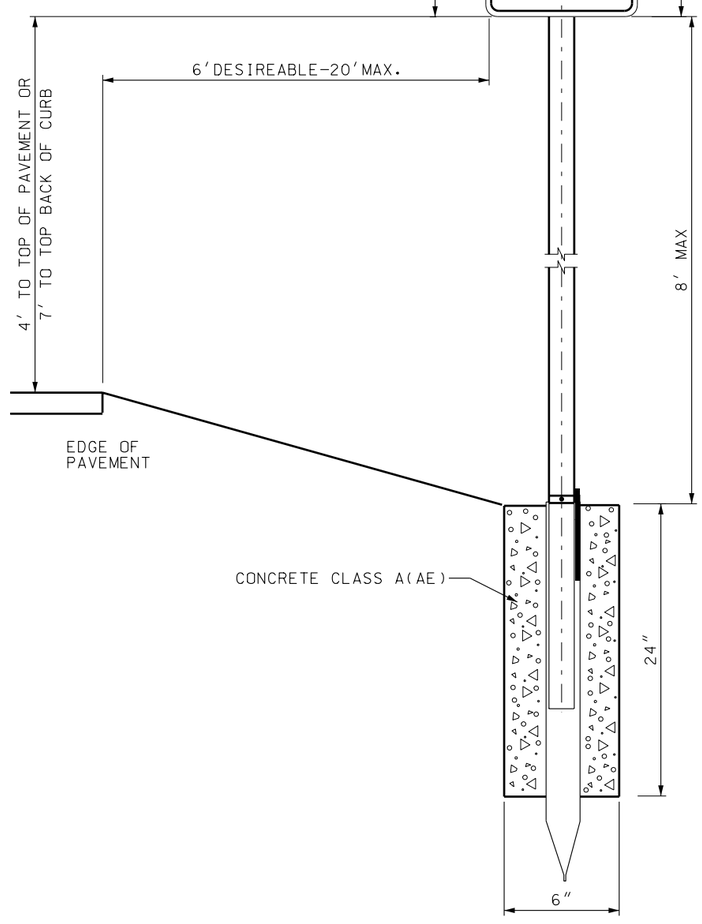

TYPICAL INSTALLATION

NOTES:

1. USE: 12" WIDE FOR INTERSTATE
   10" ALL OTHER HIGHWAYS.
2. REFLECTORIZED WHITE LEGEND AND BORDER ON A REFLECTORIZED GREEN BACKGROUND.
3. DO NOT EXCEED 8' MOUNTING HEIGHT FROM BOTTOM OF SIGN TO THE GROUND WHILE MAINTAINING 4' MINIMUM HEIGHT ABOVE PAVEMENT EDGE.
4. USE "TUBULAR STEEL SIGN POST (P2)". FASTEN PANEL WITH 5/16"x 3" S.S. BOLT; LOCK NUT, USE 5/16" NYLON WASHER AGAINST SIGN FACE.

REVISIONS

NO.	DATE	APPR.	REMARKS

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL — JAN.01,2005 DATE
CHAIRMAN STANDARDS COMMITTEE APPROVED — JAN.01,2005 DATE
DEPUTY DIRECTOR

TYPICAL INSTALLATION FOR MILEPOST SIGNS

STANDARD DRAWING TITLE

STD DWG
SN 5

DGN File:N:\Std\Standard Drawings\Imperial\2005Approved\Signs (SN)\sn05.dgn
15-DEC-2004