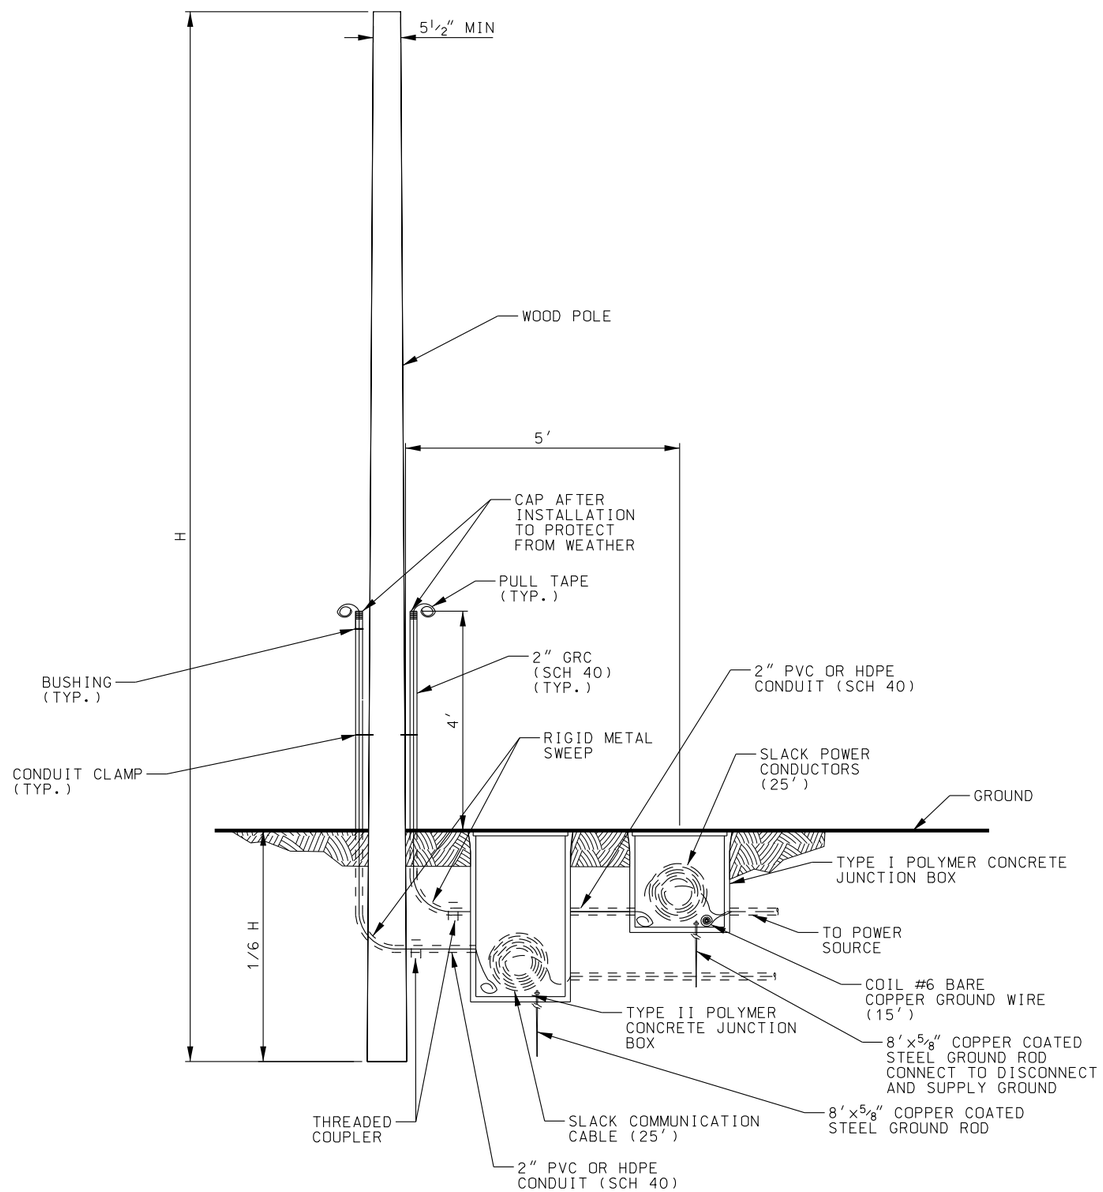


A / AT 13 HAR POLE DETAIL

## NOTES:

1. SIZE POLE DIAMETER PER HAR VENDOR RECOMMENDATIONS, ACCOMODATING ALL EQUIPMENT ATTACHMENTS.
2. LOCATE POLE A MINIMUM OF 1.2 TIMES THE AASHTO CLEAR ZONE DISTANCE AWAY FROM THE TRAVELED WAY, OR SHIELD AS PER THE CURRENT EDITION OF THE ROADSIDE DESIGN GUIDE.

REVISIONS

| NO. | DATE | APPR. | REMARKS |
|---|---|---|---|
| | | | |

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL — JAN.01,2008 DATE
CHAIRMAN STANDARDS COMMITTEE
APPROVED — JAN.01,2008 DATE
DEPUTY DIRECTOR

HAR POLE DETAIL
STANDARD DRAWING TITLE

STD DWG
AT 13

DGN File:L:\Standard Drawings\Imperial\2008\Approved\Advanced Traffic Management System (ATM)\at13.dgn
18-DEC-2007