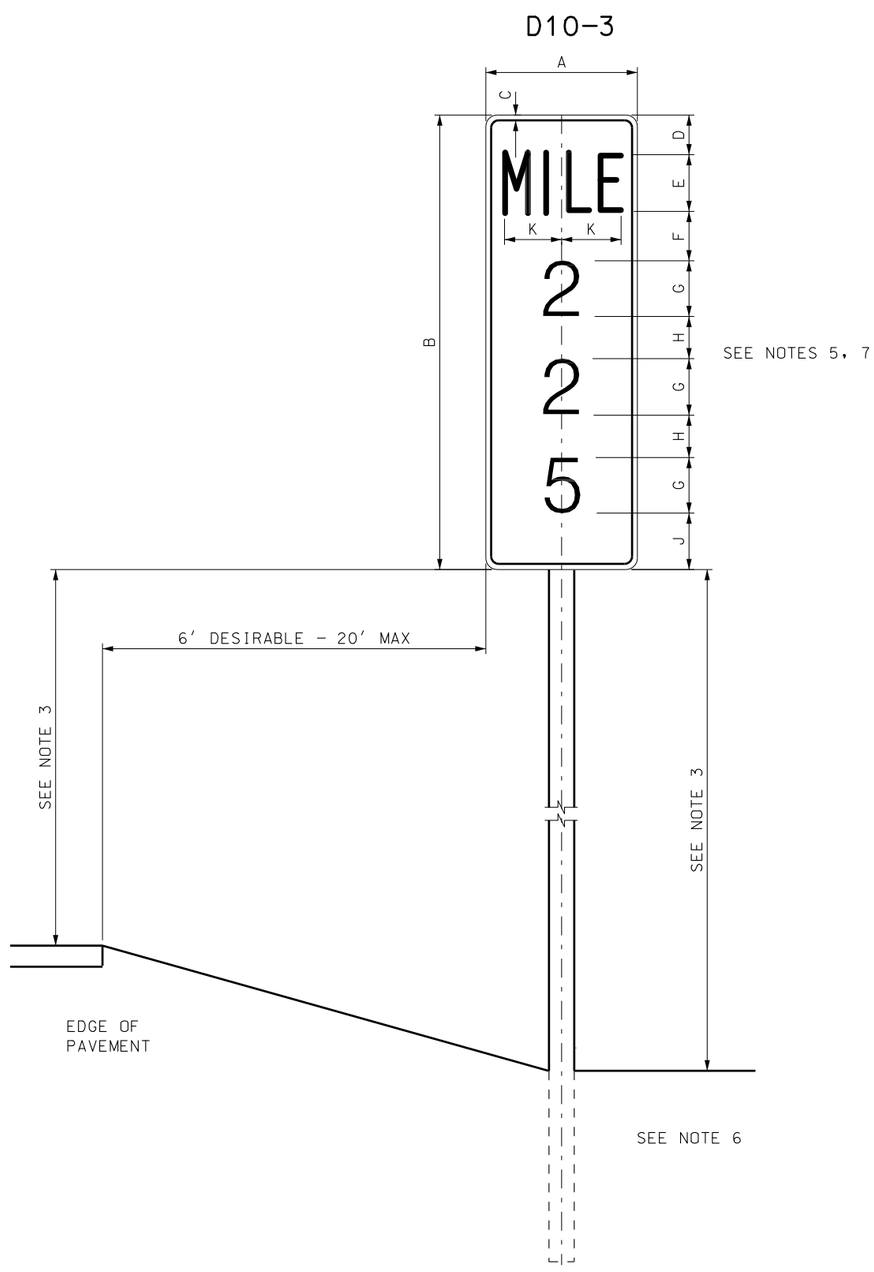

TYPICAL INSTALLATION

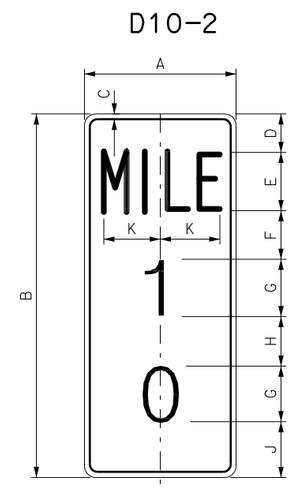

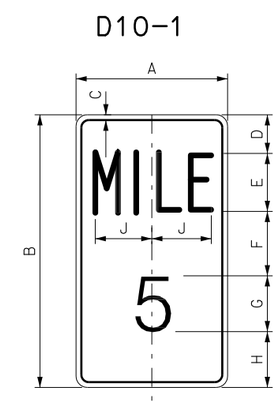

NOTES:

1. USE: 12" WIDE FOR INTERSTATE
   10" ALL OTHER HIGHWAYS.

2. RETROREFLECTORIZED WHITE LEGEND AND BORDER ON A RETROREFLECTORIZED GREEN BACKGROUND. SEE STANDARD SPECIFICATION 2891 FOR SIGN SHEETING REQUIREMENTS.

3. DO NOT EXCEED 8' MOUNTING HEIGHT FROM BOTTOM OF SIGN TO THE GROUND. MAINTAIN 4' MINIMUM HEIGHT ABOVE PAVEMENT EDGE. MAINTAIN 7' MINIMUM HEIGHT OVER BIKE AND PED MOVEMENT.

4. SEE STD DWG SN 13 SERIES FOR SIGN MOUNTING OPTIONS AND REQUIREMENTS.

5. SEE STD DWG SN 9 SERIES FOR SIGN BASE AND POST OPTIONS.

6. SEE STANDARD HIGHWAY SIGNS FOR SIGN LEGEND SIZES.

REVISIONS

NO.	DATE	APPR.	REMARKS

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL — JAN.01,2008 DATE
CHAIRMAN STANDARDS COMMITTEE
APPROVED — JAN.01,2008 DATE
DEPUTY DIRECTOR

TYPICAL INSTALLATION FOR MILEPOST SIGNS

STANDARD DRAWING TITLE

STD DWG
SN 5

DGN File:L:\Standard.Drawings\Imperial\2008Approved\Signs (SN)\SN05.dgn
18-DEC-2007