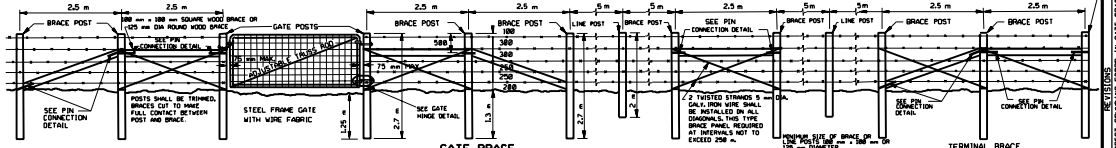

INSTALLATION WITH WOOD POSTS

(TYP.)

POST SIZE, SPACING AND BRACING FOR TYPES A, B, D, E AND F FENCE SHALL BE THE SAME AS SHOWN IN TYP. INSTALLATION ABOVE. THERE SHALL BE TWO STAYS EVENLY SPACED BETWEEN EACH SET OF POSTS.





TYPE F

TO BE INSTALLED IN DEER COUNTRY

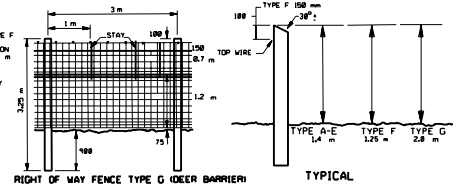

SPACING AND BRACING TYPE F SHALL BE THE SAME AS SHOWN IN TYP. INSTALLATION ABOVE. POSTS MAY BE 2 m IN LENGTH.

RIGHT OF WAY FENCE TYPE G (DEER BARRIER)

TYPICAL

NOTE: LAP THE 1.2 m & 0.7 m MESH WIRE 50 mm. THE 1.2 m & 0.7 m MESH WIRE SHALL BE WIRE TIED OR CLAMPED TOGETHER. THE SPACING OF THE CONNECTIONS SHALL NOT EXCEED 0.6 m.



TYPICAL SAG SECTION



CATTLE PASS FENCE DETAIL



LINE BRACE FOR TYPE G FENCE

BRACE AT INTERVALS NOT EXCEEDING 120 m.

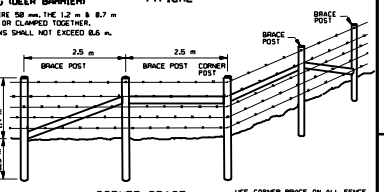

CORNER BRACE

USE CORNER BRACE ON ALL FENCE LINE DEVIATION WHEN WOOD POSTS ARE USED



TYPICAL VERTICAL ALIGNMENT CHANGE

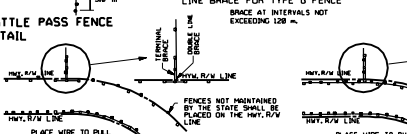

POST & WIRE LOCATION



POST & WIRE LOCATION

ALL DIMENSION ARE IN MILLIMETERS (mm) EXCEPT AS NOTED.

NO.	DATE	APPR.	REVISIONS
1	04/08/96		CORRECT ROTATION STAMP IN GATE BRACE DETAIL.
2	06/27/96		BRACE POSTS. CORRECT DIMENSION NOTE

UTAH DEPARTMENT OF TRANSPORTATION

STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION

SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL: APR.27.1999 DATE

CHAIRMAN, STANDARDS COMMITTEE

APPROVED: APR.27.1999 DATE

DEPUTY DIRECTOR

REGIONS

(METRIC)

RIGHT OF WAY FENCE AND GATES (WOOD POST)

STANDARD DRAWING TITLE

STD. DWG. NO.

720-1A