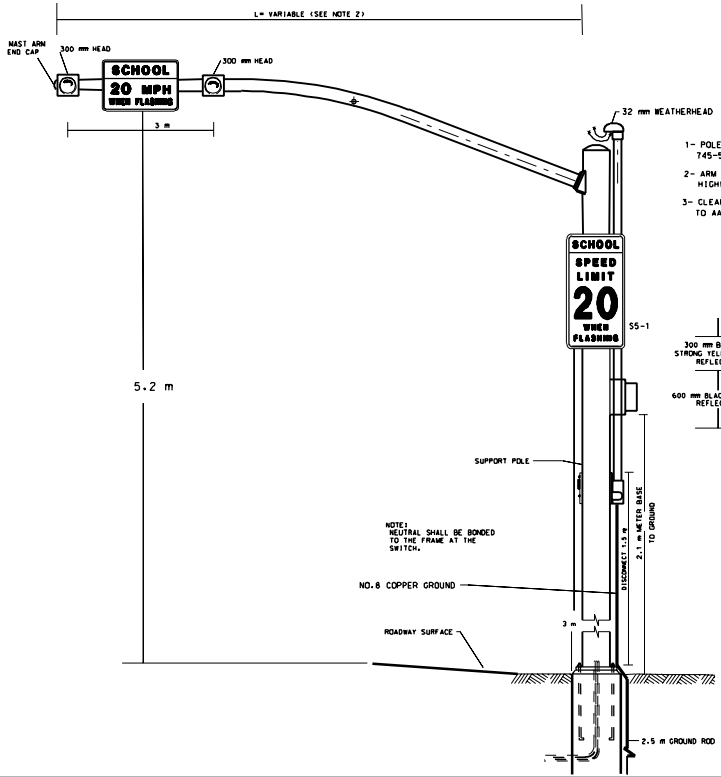

NOTES

1- POLES , ARMS & FOUNDATION SEE STANDARD DRAWINGS 745-55A1- A2- C.

2- ARM LENGTH SHOULD BE DESIGNED INDIVIDUALLY DEPENDING ON HIGHWAY GEOMETRICS.

3- CLEAR ZONE PROTECTION SHALL BE PROVIDED ACCORDING TO AASHTO GUIDELINES.



ALL DIMENSIONS ARE SHOWN IN MILLIMETERS (mm) UNLESS OTHERWISE NOTED.

NO.	DATE	APPR.	REMARKS
1	04-22-99	R.A.	DRAWING ELECTRONICALLY CHANGED. NO CHANGE IN CONCEPT.
2	10-23-01	F.L.	CHANGED COLOR YELLOW TO STRONG YELLOW GREEN

REVISIONS

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL: NOV. 14-2000 DATE

CHAIRMAN STANDARDS COMMITTEE

APPROVED: NOV. 14-2000 DATE

DEPUTY DIRECTOR

(METRIC)

OVERHEAD SCHOOL FLASHER

STANDARD DRAWING TITLE

STD. DWG. NO.

745-48B