SIGN INSTALLATION

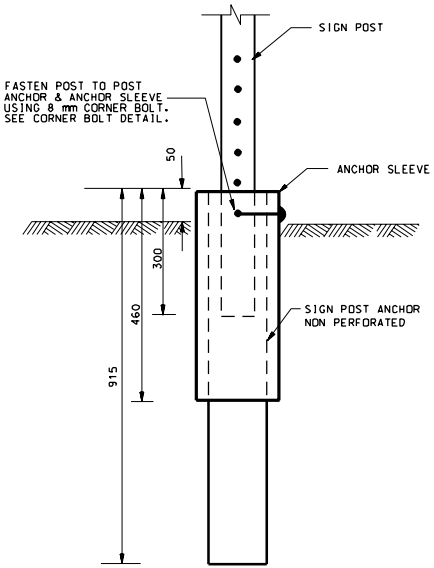

TYPICAL INSTALLATION . HIGH IMPACT AREAS

(TWO PIECE BREAKAWAY ANCHOR)

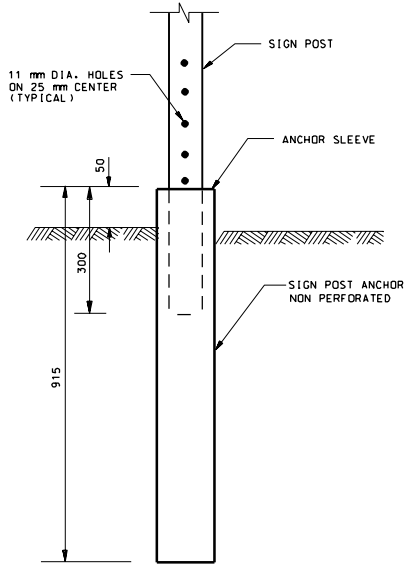

TYPICAL INSTALLATION

(W/ONE PIECE BREAKAWAY ANCHOR)

SQUARE STEEL SIGN POSTS

VERTICAL SIGN DIMENSION (mm)	HORIZONTAL SIGN DIMENSION (mm)											
	300	600	900	1200	1500	1800	2100	2400	2750	3050	3350	3650
300	1 T1	1 T1	1 T1	1 T1	2 T1	2 T1	2 T1	2 T1	2 T1	2 T1	2 T1	2 T1
450	1 T1	1 T1	1 T1	1 T1	2 T1	2 T1	2 T1	2 T1	2 T1	2 T1	2 T1	2 T2
600	1 T1	1 T1	1 T1	1 T1	2 T1	2 T1	2 T1	2 T1	2 T2	2 T2	2 T2	2 T2
760	1 T1	1 T1	1 T2	2 T1	2 T1	2 T1	2 T2	2 T2	2 T2	2 T2	2 T2	
900	1 T1	1 T1	1 T2	2 T1	2 T1	2 T2	2 T2	2 T2	2 T2			
1060	1 T1	1 T2	1 T2	2 T1	2 T2	2 T2	2 T2					
1200	1 T1	1 T2	2 T1	2 T2	2 T2	2 T2						
1350	1 T1	1 T2	2 T2	2 T2	2 T2							
1500	1 T1	1 T2	2 T2	2 T2								
1650	1 T1	1 T2	2 T2									
1800	1 T1	1 T2	2 T2									

T1 = 50 mm 12 GAUGE W/56 mm ANCHOR. 63mm SLEEVE

T2 = 63 mm 12 GAUGE W/70 mm ANCHOR. 76 mm SLEEVE

1. FOR SOFT SOIL USE TRIANGULAR STEEL SIGN POST ANCHOR: REFER TO STD.DWG. 745-60B

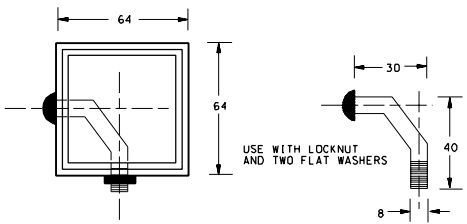

CORNER BOLT DETAIL

ALL DIMENSIONS ARE SHOWN IN MILLIMETERS (mm) UNLESS OTHERWISE NOTED.

REVISIONS

NO.	DATE	APPR.	REMARKS

UTAH DEPARTMENT OF TRANSPORTATION

STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION

SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL — DEC.11.2001 DATE

CHAIRMAN STANDARDS COMMITTEE

APPROVED — DEC.11.2001 DATE

DEPUTY DIRECTOR

(METRIC)

GROUND MOUNT SQUARE STEEL SIGN POST (P3)

STANDARD DRAWING TITLE

STD. DWG. NO.

745-60C