



DETAIL A

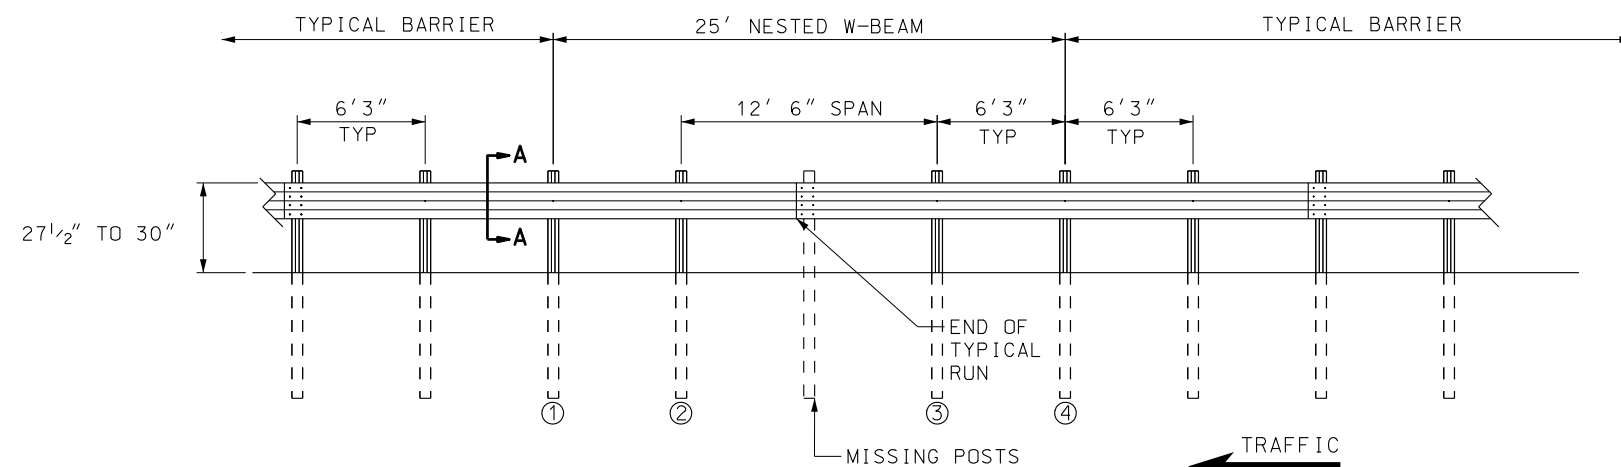

DETAIL B

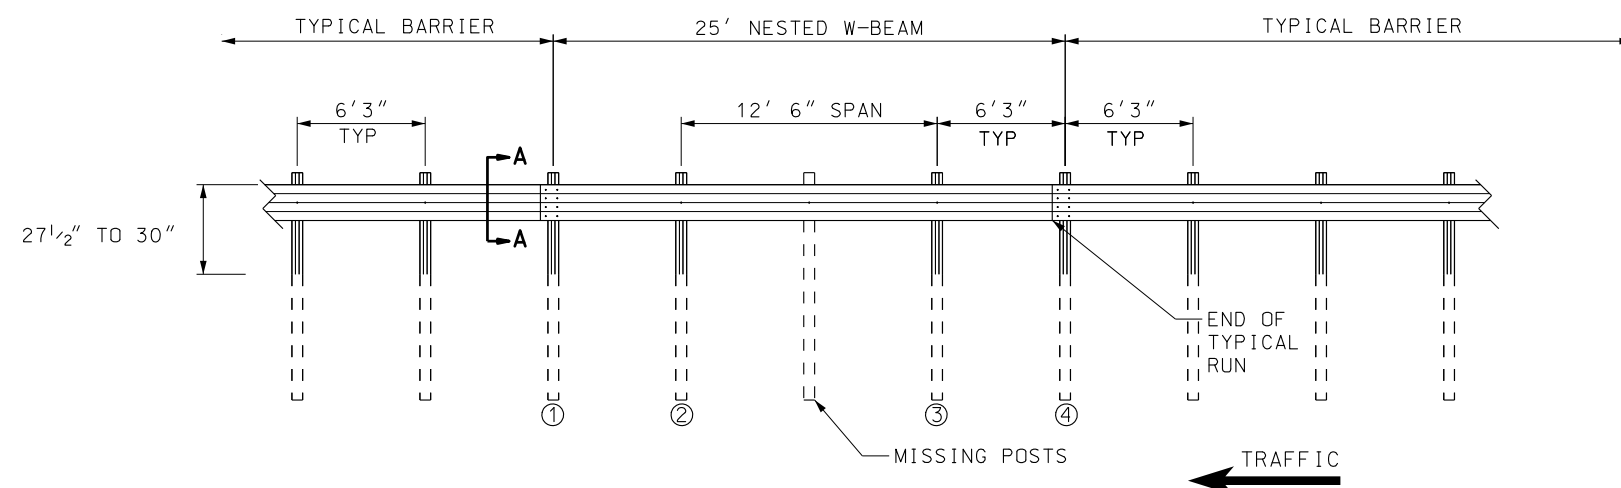

DETAIL C

NOTES FOR DETAIL "A"


1. SPLICE POINT AT POST 4 OF TYPICAL RUN USING 25' W-BEAM PANEL, ADD AN ADDITIONAL 12'6" PANEL BETWEEN POST 4 AND 6.
2. PLACE A SECOND W-BEAM PANEL BEHIND TYPICAL RUN AT POSTS 1 THROUGH 6 .
3. MAKE ALL SPLICES AND BOLT RAIL ELEMENTS TOGETHER AS PER GUARDRAIL INSTALLATION REQUIREMENTS.

NOTES FOR DETAIL "B"

1. SPLICE POINT BETWEEN POST 2 AND 3 OF TYPICAL RUN USING 25' W-BEAM PANELS.
2. PLACE A SECOND W-BEAM PANEL BEHIND TYPICAL RUN AT POST 1 THROUGH 4.
3. MAKE ALL SPLICES AND BOLT RAIL ELEMENTS TOGETHER AS PER GUARDRAIL INSTALLATION REQUIREMENTS.

NOTES FOR DETAIL "C"

1. SPLICE POINT AT POST 1 AND 4 OF TYPICAL RUN USING 25' W-BEAM PANELS.
2. PLACE A SECOND W-BEAM PANEL BEHIND TYPICAL RUN AT POST 1 THROUGH 4.
3. MAKE ALL SPLICES AND BOLT RAIL ELEMENTS TOGETHER AS PER GUARDRAIL INSTALLATION REQUIREMENTS.

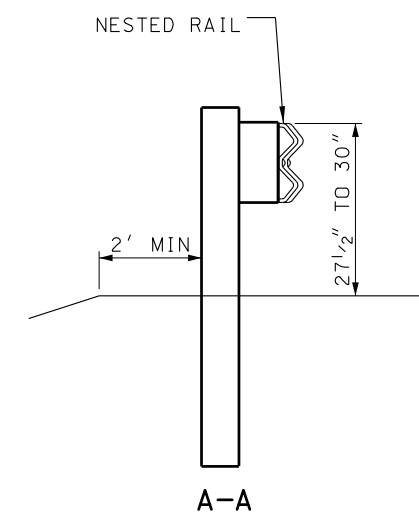

REVISIONS					
N ^{O.}	DATE	APPR.	REMARKS		

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
SALT LAKE COUNTY

RECOMMENDED FOR APPROVAL _____ JAN. 01, 2008
DATE

CHAIRMAN STANDARDS COMMITTEE _____ JAN. 01, 2008
APPROVED DATE

DEPUTY DIRECTOR _____

W-BEAM GUARDRAIL
NESTED GUARDRAIL
12'6" SPAN

STANDARD DRAWING TITLE

STD DWG
BA 4M