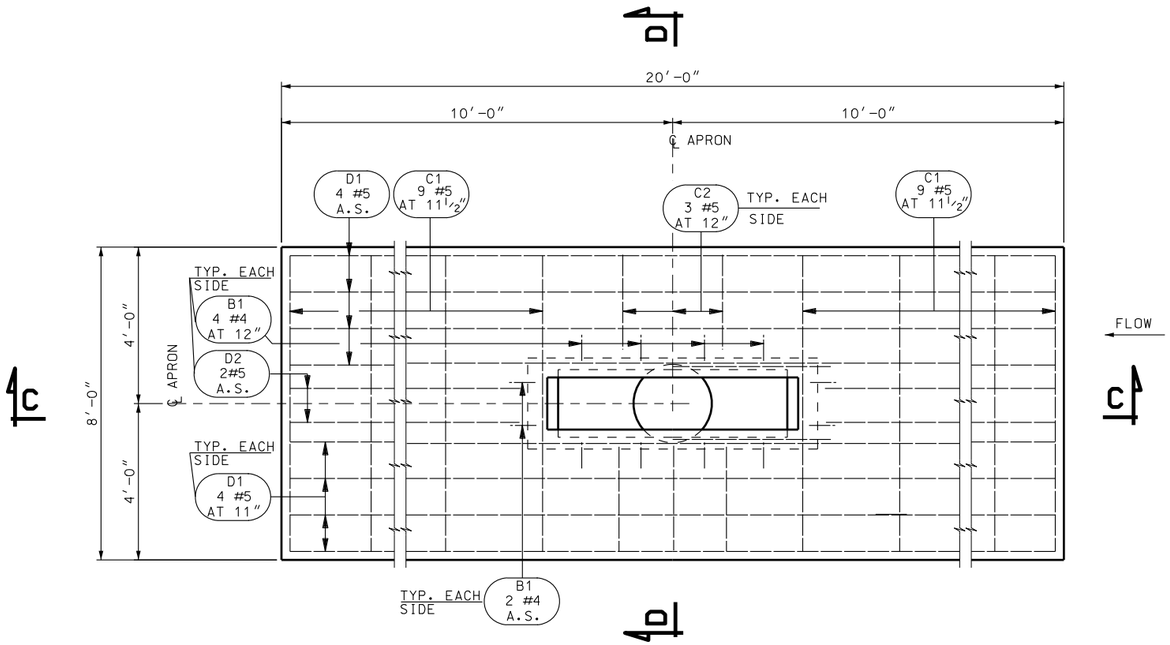

PLAN

NOTES:

1. CENTER APRON ON CHANNEL FLOWLINE.
2. PLACE 6″ OF UNTREATED BASE COURSE AND COMPACT PER UDOT STANDARD SPECIFICATIONS UNDER EACH APRON PRIOR TO FORMING.
3. FIELD BEND D1 BARS AS REQUIRED TO CONFORM TO SLOPE.
4. PROVIDE 2″ CONCRETE COVER TO REINFORCING STEEL EXCEPT WHERE NOTED OTHERWISE.
5. USE NORMAL APRON WITH DROP INLET TYPE "B."
6. REPAIR ANY DAMAGE OR CUTS TO EPOXY COATING.

QUANTITIES
(FOR INFORMATION ONLY)

REINF. STEEL (LB.)	CONC. (CU.YD.)
606	3.9

REINFORCING STEEL SCHEDULE

A1			A2			A3		
SIZE	NO.	LENGHT	SIZE	NO.	LENGHT	SIZE	NO.	LENGHT
4	4	4′-4″	4	8	3′-5″	4	4	2′-0″

B1		
SIZE	NO.	a (1′-2″)
4	12	VARIES

C1			C2		
SIZE	NO.	LENGHT	SIZE	NO.	LENGHT
5	18	19′-6″	5	3	2′-10″

D1			D2		
SIZE	NO.	LENGHT	SIZE	NO.	LENGHT
5	8	19′-8″	5	4	5′-5″

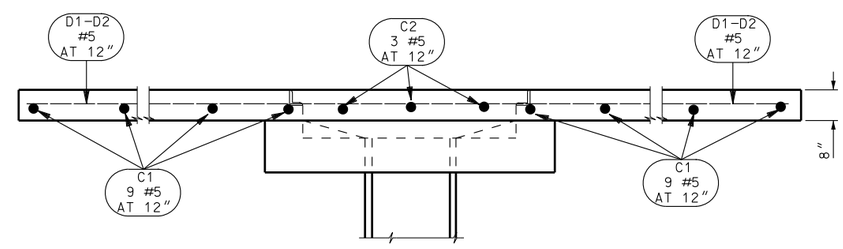

SECTION C-C

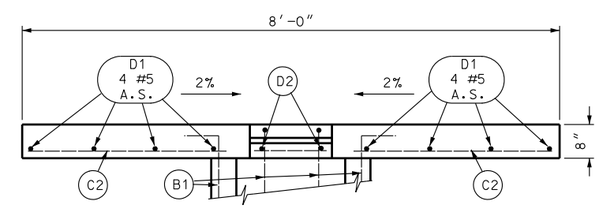

SECTION D-D

NO.	DATE	APPR.	REMARKS

REVISIONS

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL — JAN.01,2008 DATE
CHAIRMAN STANDARDS COMMITTEE APPROVED — JAN.01,2008 DATE
DEPUTY DIRECTOR

NORMAL APRON
WITH DROP INLET
TYPE "B"

STANDARD DRAWING TITLE

STD DWG
CB 7B

DGN File:L:\Standard Drawings\Imperial\2008Approved\Catch Basins and Cleanouts (CB)\CB07B.dgn
18-DEC-2007